

DL3316

1" x 1" Axial Diffuse Illuminator



- 4i** Even illumination over the full 25mm x 25mm field of view.
- 4i** Designed for use on small parts, or in environments with space limitations.

Ordering Information

Standard Product:
Shipped Next Day

DL3316

P/N: DL3316-660
Configured for use with Ai Power Supply

Standard Product Variation:
Shipped Within Two Weeks


	Spectral wavelength		Optional power Compatibility		Optional light Conditioning
DL3316 -	XXX		XX		X
	(blue) 470 [†]		12		D (Diffuser)
	(green) 520 [†]		24		
	(yellow) 590				
	(orange) 625				
	(red) 660				
	(infra-red) 880				
	(white) WHI [†]				

Optimal working distance:
25.4mm (1")

Effective Working Range:
12.7-50mm (.5"-2")

[†]Not available in 12v

Dimensional Information

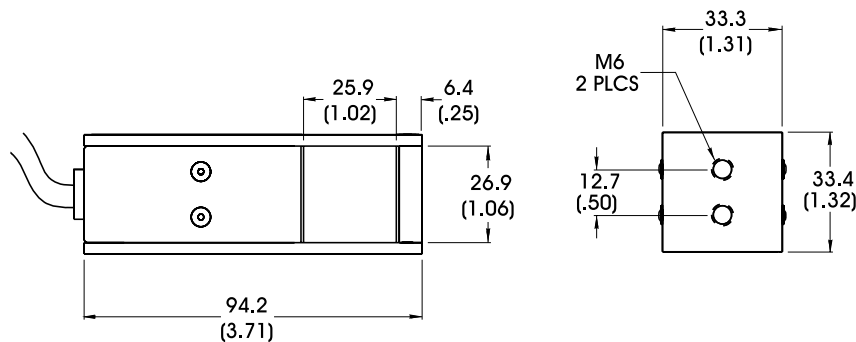

DIMENSIONS ARE IN MILLIMETERS (INCHES)

Standard Variation Current Specifications										Standard Product Information	
	blue	green	yellow	orange	red	infra-red	white	RGB			
@12	N/A	N/A	80	80	120	120	N/A	N/A	mA	Product Lifetime:	50,000 hours
@24	80	80	40	40	60	60	80	N/A	mA	Operating Temperature:	0-60° C